
# Geberit system pipe, ML, in bars

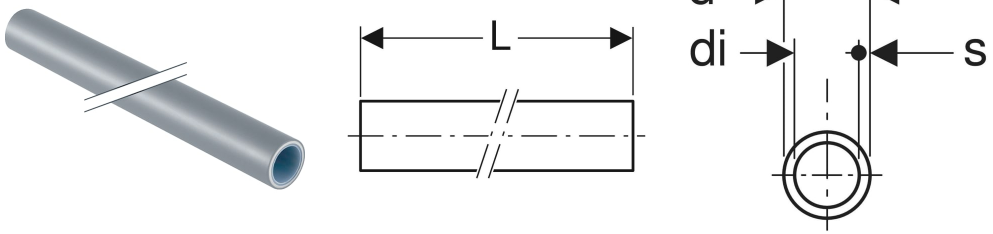


Example image

## APPLICATION PURPOSES

- For Geberit FlowFit
- For Geberit PushFit
- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For service water and process water
- For treated water
- For rainwater with a pH value ≥ 5.5
- For seawater
- For extinguishing water (wet)
- For extinguishing water (wet/dry, dry)
- For chemicals and technical liquids
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)
- For technical building systems, industry and shipbuilding

## CHARACTERISTICS

- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- Silver grey RAL 7001 exterior
- Pipe end with transparent protection plug

## TECHNICAL DATA

| | |
|---|---|
| Product material | PE-RT II / Al / PE-RT II |
| Surface roughness | 7 µm |
| Thermal expansion | 0.026 mm/(m·K) |
| Thermal conductivity, pipe | 0.41 W/(m·K) |

## ACCESSORIES

- Geberit pliers
- Geberit FlowFit calibration tool
- Geberit pipe cutter ML
- Geberit anchor-point bracket

| Art. no. | DN | d, ø mm | di, ø mm | s mm | L m |
|---|---|---|---|---|---|
| These articles are suitable for the following system: **Geberit FlowFit** | | | | | |
| **619.010.00.1** | 12 | 16 | 12 | 2 | 3 |

| Art. no. | DN | d, ø mm | di, ø mm | s mm | L m |
|---|---|---|---|---|---|
| **619.011.00.1** | 15 | 20 | 16 | 2 | 3 |
| **619.012.00.1** | 20 | 25 | 20 | 2.5 | 3 |
| **619.013.00.1** | 25 | 32 | 26.4 | 2.8 | 3 |
| **619.014.00.1** | 32 | 40 | 34 | 3 | 3 |
| **619.015.00.1** | 40 | 50 | 42.4 | 3.8 | 3 |
| **619.016.00.1** | 50 | 63 | 55 | 4 | 3 |
| **619.020.00.1** | 12 | 16 | 12 | 2 | 5 |
| **619.021.00.1** | 15 | 20 | 16 | 2 | 5 |
| **619.022.00.1** | 20 | 25 | 20 | 2.5 | 5 |
| **619.023.00.1** | 25 | 32 | 26.4 | 2.8 | 5 |
| **619.024.00.1** | 32 | 40 | 34 | 3 | 5 |
| **619.025.00.1** | 40 | 50 | 42.4 | 3.8 | 5 |
| **619.026.00.1** | 50 | 63 | 55 | 4 | 5 |

| Art. no. | DN | d, ø mm | di, ø mm | s mm | L m |
|---|---|---|---|---|---|
| **619.027.00.1** | 65 | 75 | 65.8 | 4.6 | 5 |
| These articles are suitable for the following system: **Geberit PushFit** | | | | | |
| **619.010.00.1** | 12 | 16 | 12 | 2 | 3 |
| **619.011.00.1** | 15 | 20 | 16 | 2 | 3 |
| **619.012.00.1** | 20 | 25 | 20 | 2.5 | 3 |
| **619.020.00.1** | 12 | 16 | 12 | 2 | 5 |
| **619.021.00.1** | 15 | 20 | 16 | 2 | 5 |
| **619.022.00.1** | 20 | 25 | 20 | 2.5 | 5 |